


LQ-710 Type Bow Shackles with Safety Bolt

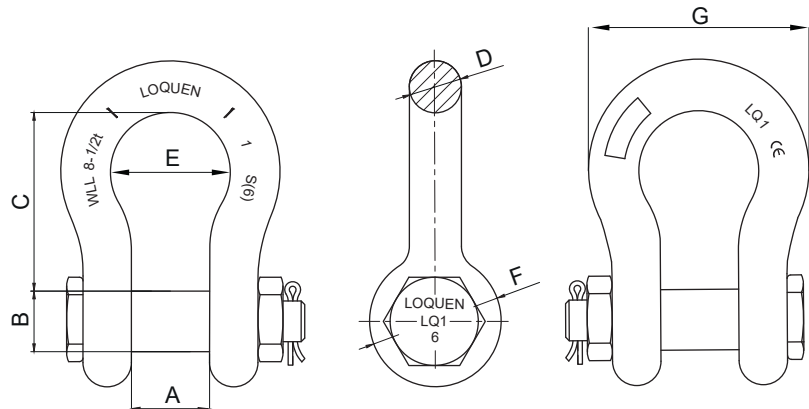

- The verification load is twice the working load limit.
- The breaking load is six times the working load limit
- Safety factor: 6:1
- Body: Hot-dip galvanized, Pin: Yellow powder coated;

Stock No.	Size (in)	WLL (t)	Dimensions(mm)							Weight (kg)
			A	B	C	D	E	F	G	
LQ-71001	3/16	0.33	9.7	6.4	22.4	4.9	15.2	14.2	24.9	0.03
LQ-71002	1/4	0.5	12	7.9	28.7	6.4	19.8	15.5	32.5	0.05
LQ-71003	5/16	0.75	13.5	9.7	31	8	21.3	21	37.3	0.1
LQ-71004	3/8	1	16.8	11.2	36.6	9.7	26.2	23	45.2	0.15
LQ-71005	7/16	1.5	18.2	12.7	42	11.2	29.5	26.5	51.5	0.22
LQ-71006	1/2	2	20	16	45	13	32	32	58	0.33
LQ-71007	5/8	3.25	27	19	59.5	16	42	39	75	0.85
LQ-71008	3/4	4.75	32	22	70.5	19	45	47	89	1.06
LQ-71009	7/8	6.5	37	25	84	22	58	53	102	1.6
LQ-71010	1	8.5	43	28	92	26	68	59.5	119	2.4
LQ-71011	1 1/8	9.5	46	32	105	29	73	67	134	3.5
LQ-71012	1 1/4	12	50	35	118	32	80	76	145	4.8
LQ-71013	1 3/8	13.5	57	38	132	35	91	84	160	6.5
LQ-71014	1 1/2	17	60.5	42	143	38	98	92	173	8.4
LQ-71015	1 3/4	25	73	50	174	44.5	124	107	216	13.9
LQ-71016	2	35	82	55	194	51	142	122	248	19.4
LQ-71017	2 1/2	55	104	70	244	64	173	150	307	39
LQ-71018	3	85	132	80	320	76.5	198	165	370	62.3
LQ-71019	3 1/2	120	145	95	372	91.5	225	202	405	110

Images for illustrative purposes only.